

AIR SOCKET SWITCH MODEL ASS61



ASS61 air switch button color

 1)PVD treatment on brass surface (circular pattern)
 2)Rose Gold (PVD Panel)
 3)Stainless steel, surface coated with decorative chromium

 4)Stainless steel glossy surface
 5)Black antique copper wire drawing (circular pattern)
 6)Dot plated matte black

The ASS61 air socket switch is provided with a snap action switching for higher current capacity. It can be used together with air button for remote control purpose, which is widely used in food waste disposer, pumps for swimming pools and spas, hot tubs, sanitary equipment, medical equipment etc.

Features


- Suitable for kitchen waste disposal, swimming pools, hot springs, cleaning equipment, etc
- Use as remote control device that works in conjunction with pneumatic buttons
- Only for indoor use

Technical parameter

General

asic information		Electrical overview	
Gas tightness	Under 50psi pressure,	Switching load	12A at 125VAC
	no leakage phenomenon	Dielectric strength	1500V
Pressure range	< 1.8psi		
Air tube	Air tube length optional	Operating conditions	
Tests / Admissions	UL 60730	Temperature	Ambient:-10+50°C[+14+122°F]


Dimensiones in mm(in)

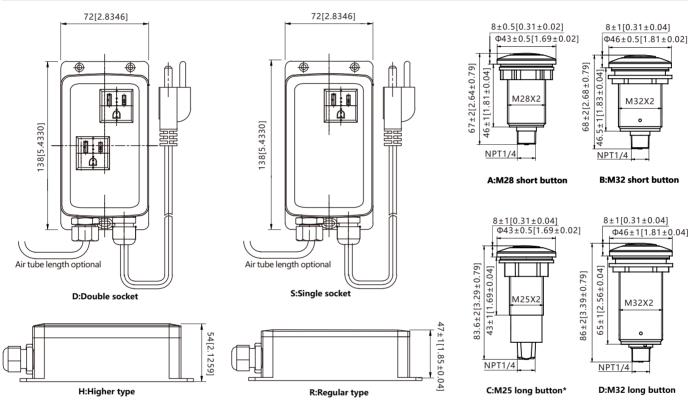

Ordering information

Example part number:ASS61-RSASA

Model ASS61 air socket switch, thickness: regular type; socket hole: single socket; button type: M28 short button; button; button: stainless steel, surface coated with decorative chromium, air tube length: 1m.

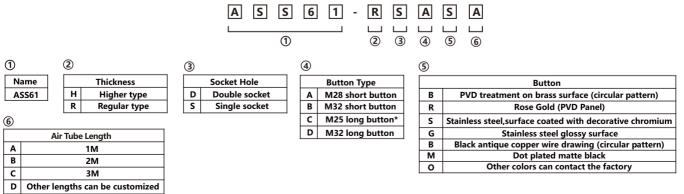

* This button is designed specifically for small hole countertops, with low air pressure and only compatible with 1-meter air pipes. If the length of the trachea exceeds this specification, the switch may not be activated.

© Anwoll industries, Inc. All rights reserved. The Anwoll name and logo are registered trademarks of Anwoll industries, Inc. | www.anwoll.com | sales@anwoll.com